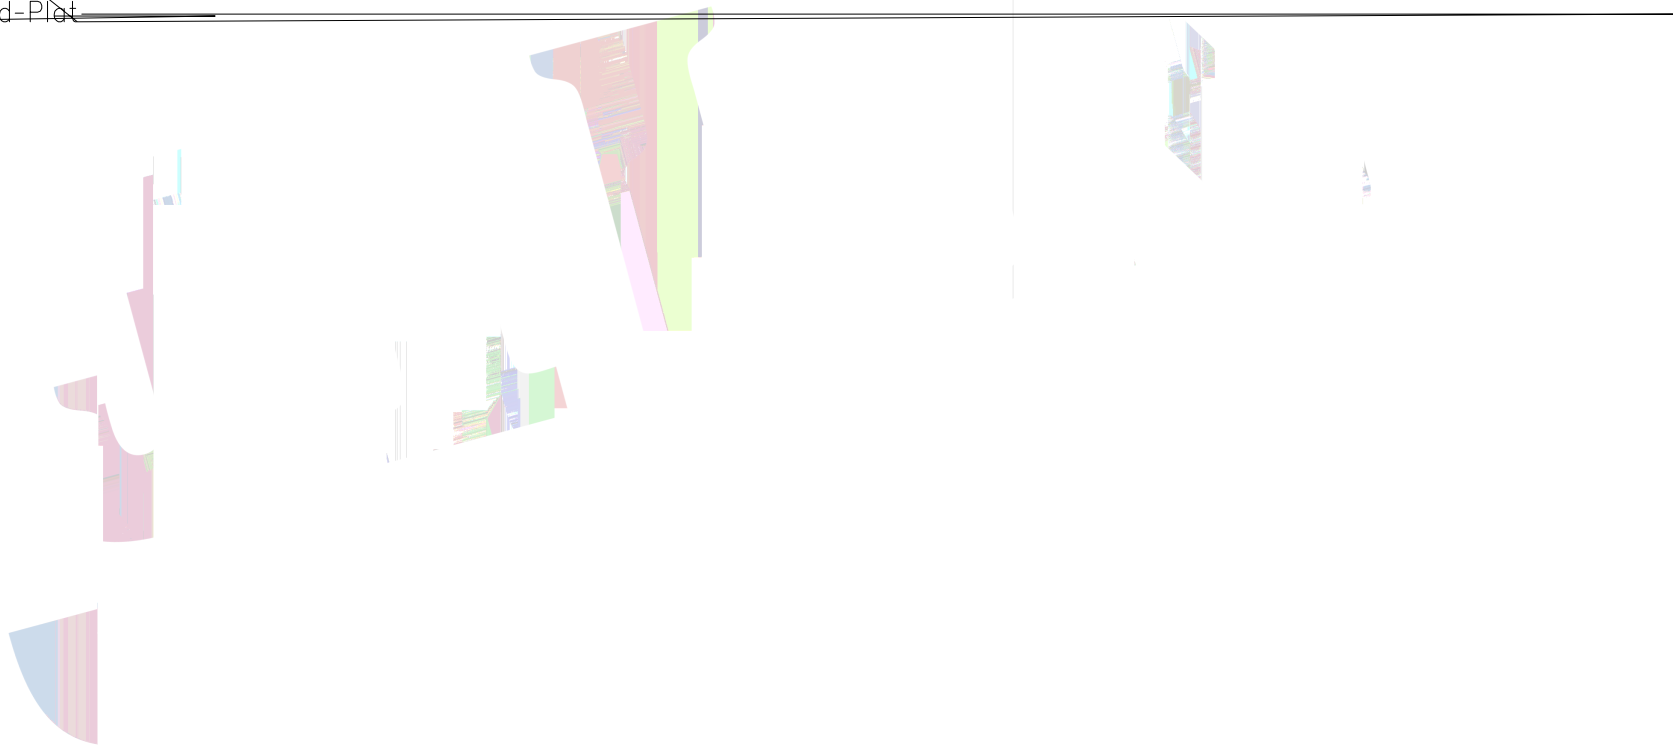



	1	2	3	4	5	6	7	8	9			
G	SPECIFICATIONS											
	PERFORMANCE											
	Electical Rating: AC/DC 50V 0.8A											
	Contact Resistance: 80mΩ Max											
	Insulation Resistance: 500MΩ Min											
F	Withstang Volt: 500V AC/minute											
	Opratng Temperature: -40°C to +125°C											
	Material											
E	Contact: Brass, Gold-Plat											
D												
C												
B												
					OPERATION	DRAW	Jelly Feng	22.08.17	SCALE	FIT		
					X.X	±0.30			UNIT	mm		
					X.XX	±0.20	CHECK		SIZE	A4		
					X.XXX	±0.10			SHEET	1/1	PART NO.	3725M040145XXFX0X
A	A0	2022.08.17	NEW DRAWING		Angle	±3°	APPROVE				TITLE:	0.80mm 浮动式 BTB 40Pin H14.5 Male
	REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL			PROJ.			
	1		2	3	4	5	6	7	8	9		