






SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s (PBT insulator)

Ordering Information
35112 XX B F R XX BNAX

No. of Pins NPin N=10, 16, 20, 32, 44, 48, 64	Contact Type F=Female	Contact Plating G0: Gold Flash S0: Gold Flash/Tin S1: 3U" Gold/Tin S2: 5U" Gold/Tin S3: 10U" Gold/Tin
--------------------------------------------------------	--------------------------	----------------------------------------------------------------------------------------------------------------------

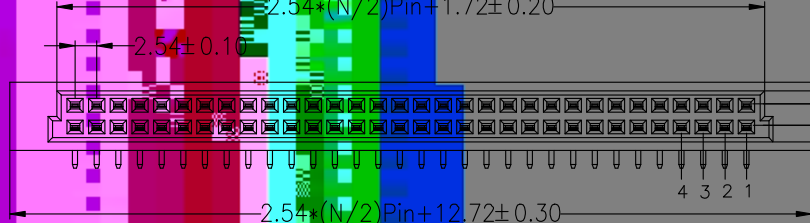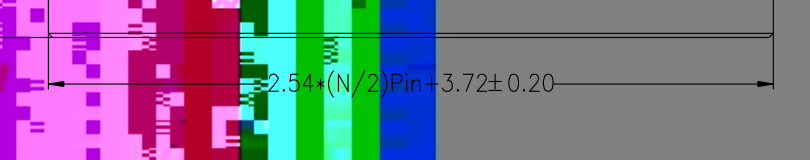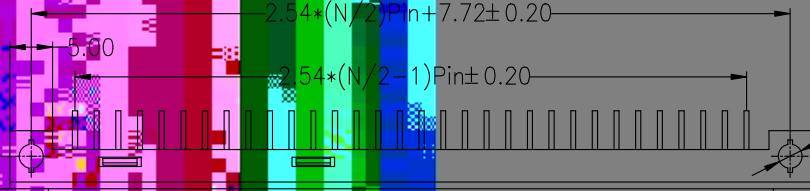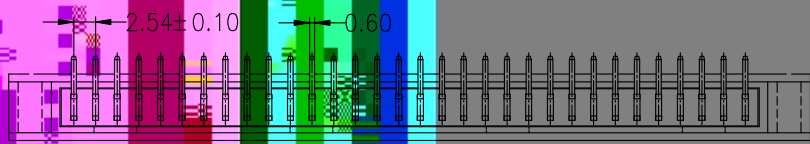

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION	DRAW	YYuSheng	14.09.16	SCALE	FIT		
				X.X ± 0.30				UNIT	mm		
B	2014.09.16	增加UL标识		X.XX ± 0.20	CHECK			SIZE	A4	PART NO.	35112XXBFRXXBNAX
A0	2014.04.11	NEW DRAWING		X.XXX ± 0.10				SHEET	1/1	TITLE:	欧式插座 母座 90度 2xNP 成品系列图
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE			PROJ.	⊕		
				DIM TOL							