

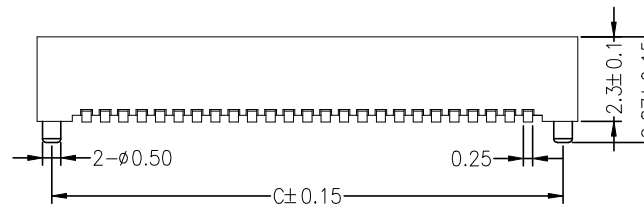


HSF RoHS

SPECIFICATIONS
PERFORMANCE

Electical Rating:AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Contact Resistance:30mΩ Max
 Withstang Volt:200V AC/minute
 Opratng Temperature:-40℃ to +105℃
 Contact Material:Phosphor Bronze
 Plating:Au or Sn over Ni
 Insulation Material:PA46
 Max.Processing Temp:260°C±5°C 5S


Dimension Table			
No Of Pins	Dim A	Dim B	Dim C
20	7.20	4.50	6.60
30	9.70	7.00	9.10
32	10.20	7.50	9.60
36	11.20	8.50	10.60
40	12.20	9.50	11.60
50	14.70	12.00	14.10
60	17.20	14.50	16.60
80	22.20	19.50	21.60
100	27.20	24.50	26.60

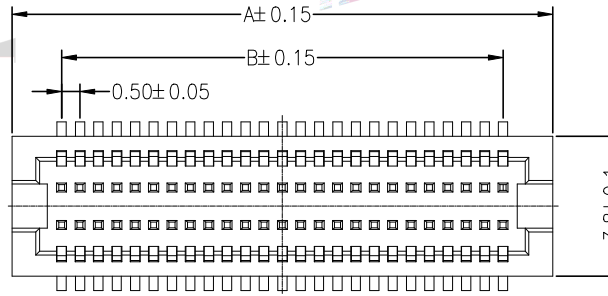

Ordering Information


3720 F XXX 023 XX X X 0X

F=Female
M=Male
 No.of pins 20~100P
 Plastic Height 023=2.3mm
 Contact Plating
 G1:Gold Flash
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin
 Insulator Material Option
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Packing
 T=Tube
 R=Reel

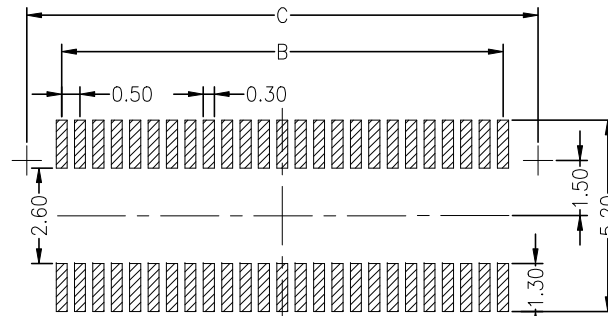

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Matting Drawing REF



OPERATION		DRAW	Jelly Feng	22.11.01	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.11.01	NEW DRAWING	

PART NO. 3720FXXX023XXXX0X
 TITLE: 0.5BTB-NPIN H=2.3母座带柱无定位片