
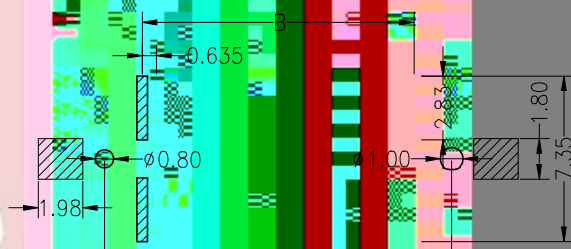

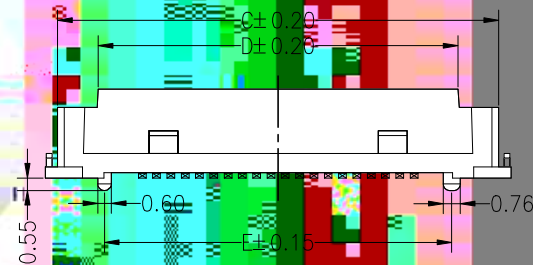


SPECIFICATIONS
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 200V AC/minute
 Contact Resistance: 30mΩ Max
 Opratng Temperature: -40°C to +105°C
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max. Processing Temp: 260°C ± 5°C 5S

Fl 1

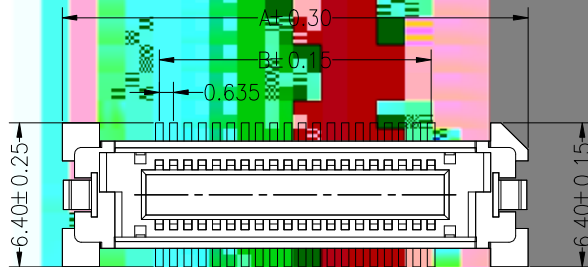

Recommended P.C.B. Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

A	AO	2022.12.17	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2022.12.17	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	X.X ± 0.30	CHECK			UNIT	mm		
					X.XX ± 0.20				SIZE	A4	PART NO.	3722MXXX040XXFX0X
					X.XXX ± 0.10				SHEET	1/1	TITLE:	0.635BTB H4.0 Male
					Angle ± 3°	APPROVE			PROJ.			
					DIM TOL							

