


HSF RoHS


SPECIFICATIONS

Current rating: 5.6AMP.
 Contact resistance: 15mΩ max. at 100mA DC
 Insulation resistance: 1000 MΩ min. at 500V DC
 Dielectric withstanding voltage: 1500V AC For 1minute
 Operating temperature: -55°C TO +125°C

Contact Material: Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 245°C±5°C For 5 Second

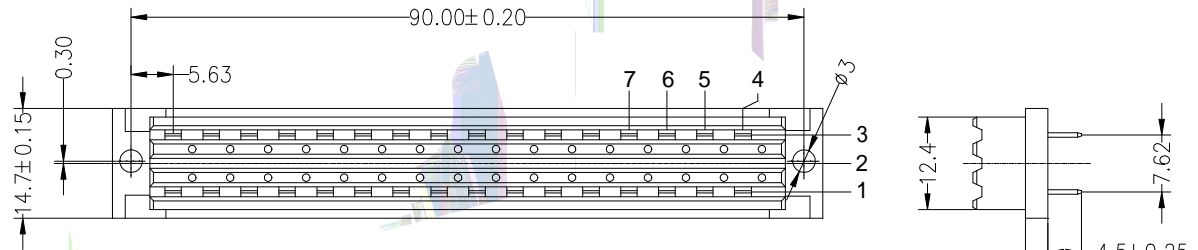

注: 缺b排

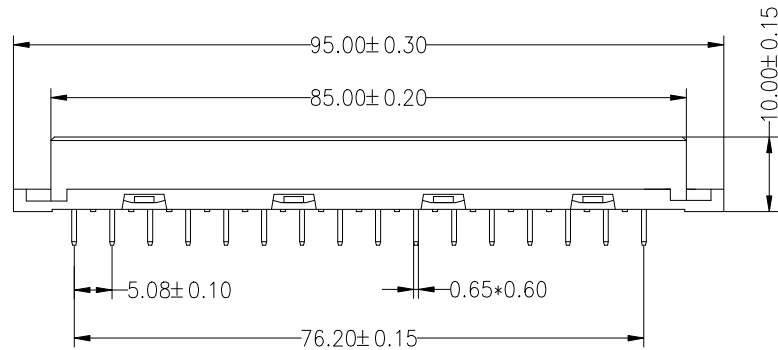

Ordering Information


35133 32 A F S XX B NAX

No. of Pins
32PIN

Contact Type
F=Female

Contact Plating
 G0: Gold Flash
 S0: Gold Flash/Tin
 S1: 3U" Gold/Tin
 S2: 5U" Gold/Tin
 S3: 10U" Gold/Tin
 S4: 15U" Gold/Tin
 S5: 30U" Gold/Tin

Code Stream

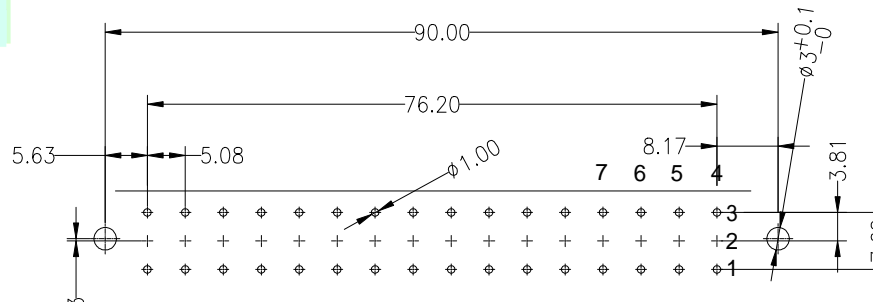

PCB LAYOUT (RECOMMENDED)
 (TOP VIEW TOL. ±0.05)

OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL				TITLE:	DIN 41612 of 5.08mm pitch large current F-type low plastic

JILN 深圳市锦凌电子有限公司
 ! " # \$! " # & # (' #) % " (" * + , - # ' * % * - / (+ 0
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 351332AFSXXBNAX
 TITLE: DIN 41612 of 5.08mm pitch large current F-type low plastic

A0	2023.03.29	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE