

HSF RoHS

SPECIFICATIONS

Current rating: 5.6AMP.

Contact resistance: 15m Ω max. at 100mA DC

Insulation resistance: 1000M Ω min. at 500V DC

Dielectric withstanding voltage: 1500V AC For 1minute

Operating temperature: -55°C TO +125°C



Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 245°C \pm 5°C For 5 Second

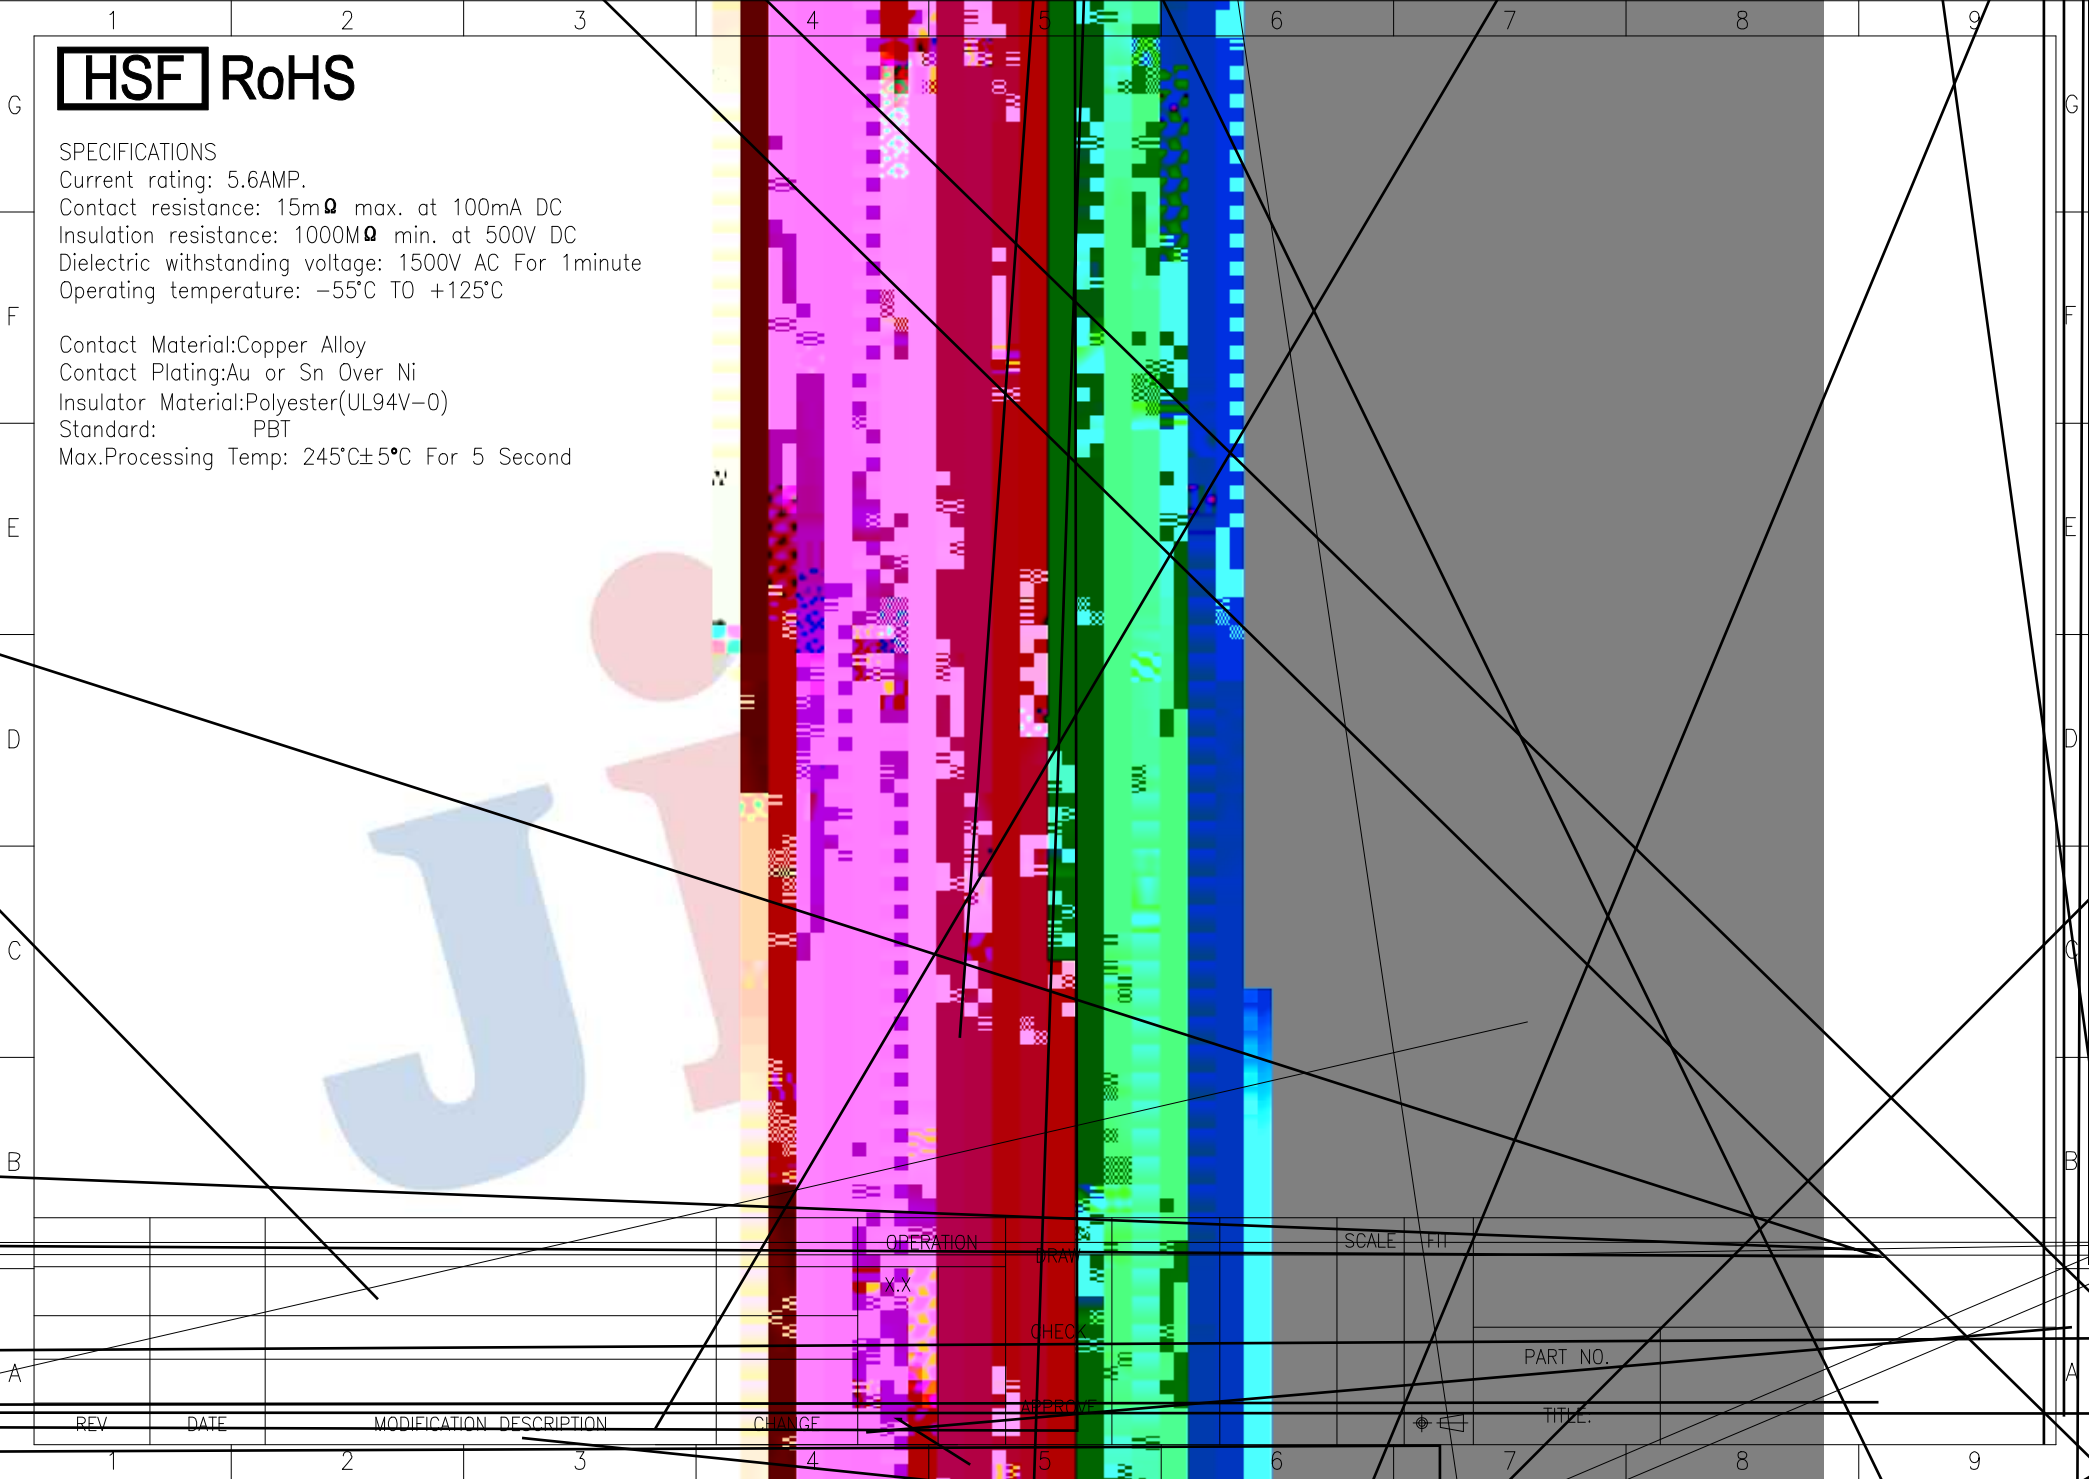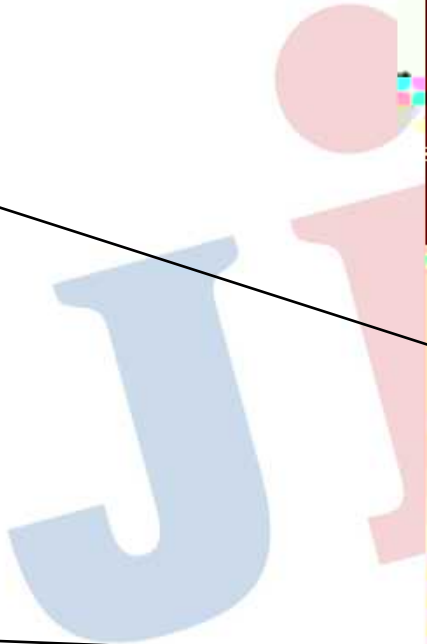

OPERATION

DRAW

SCALE

FIT

X-X

CHECK

PART NO.

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVED

TITLE

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G

A

B

C

D

E

F

G