

# HSF RoHS

## SPECIFICATIONS



Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Oper

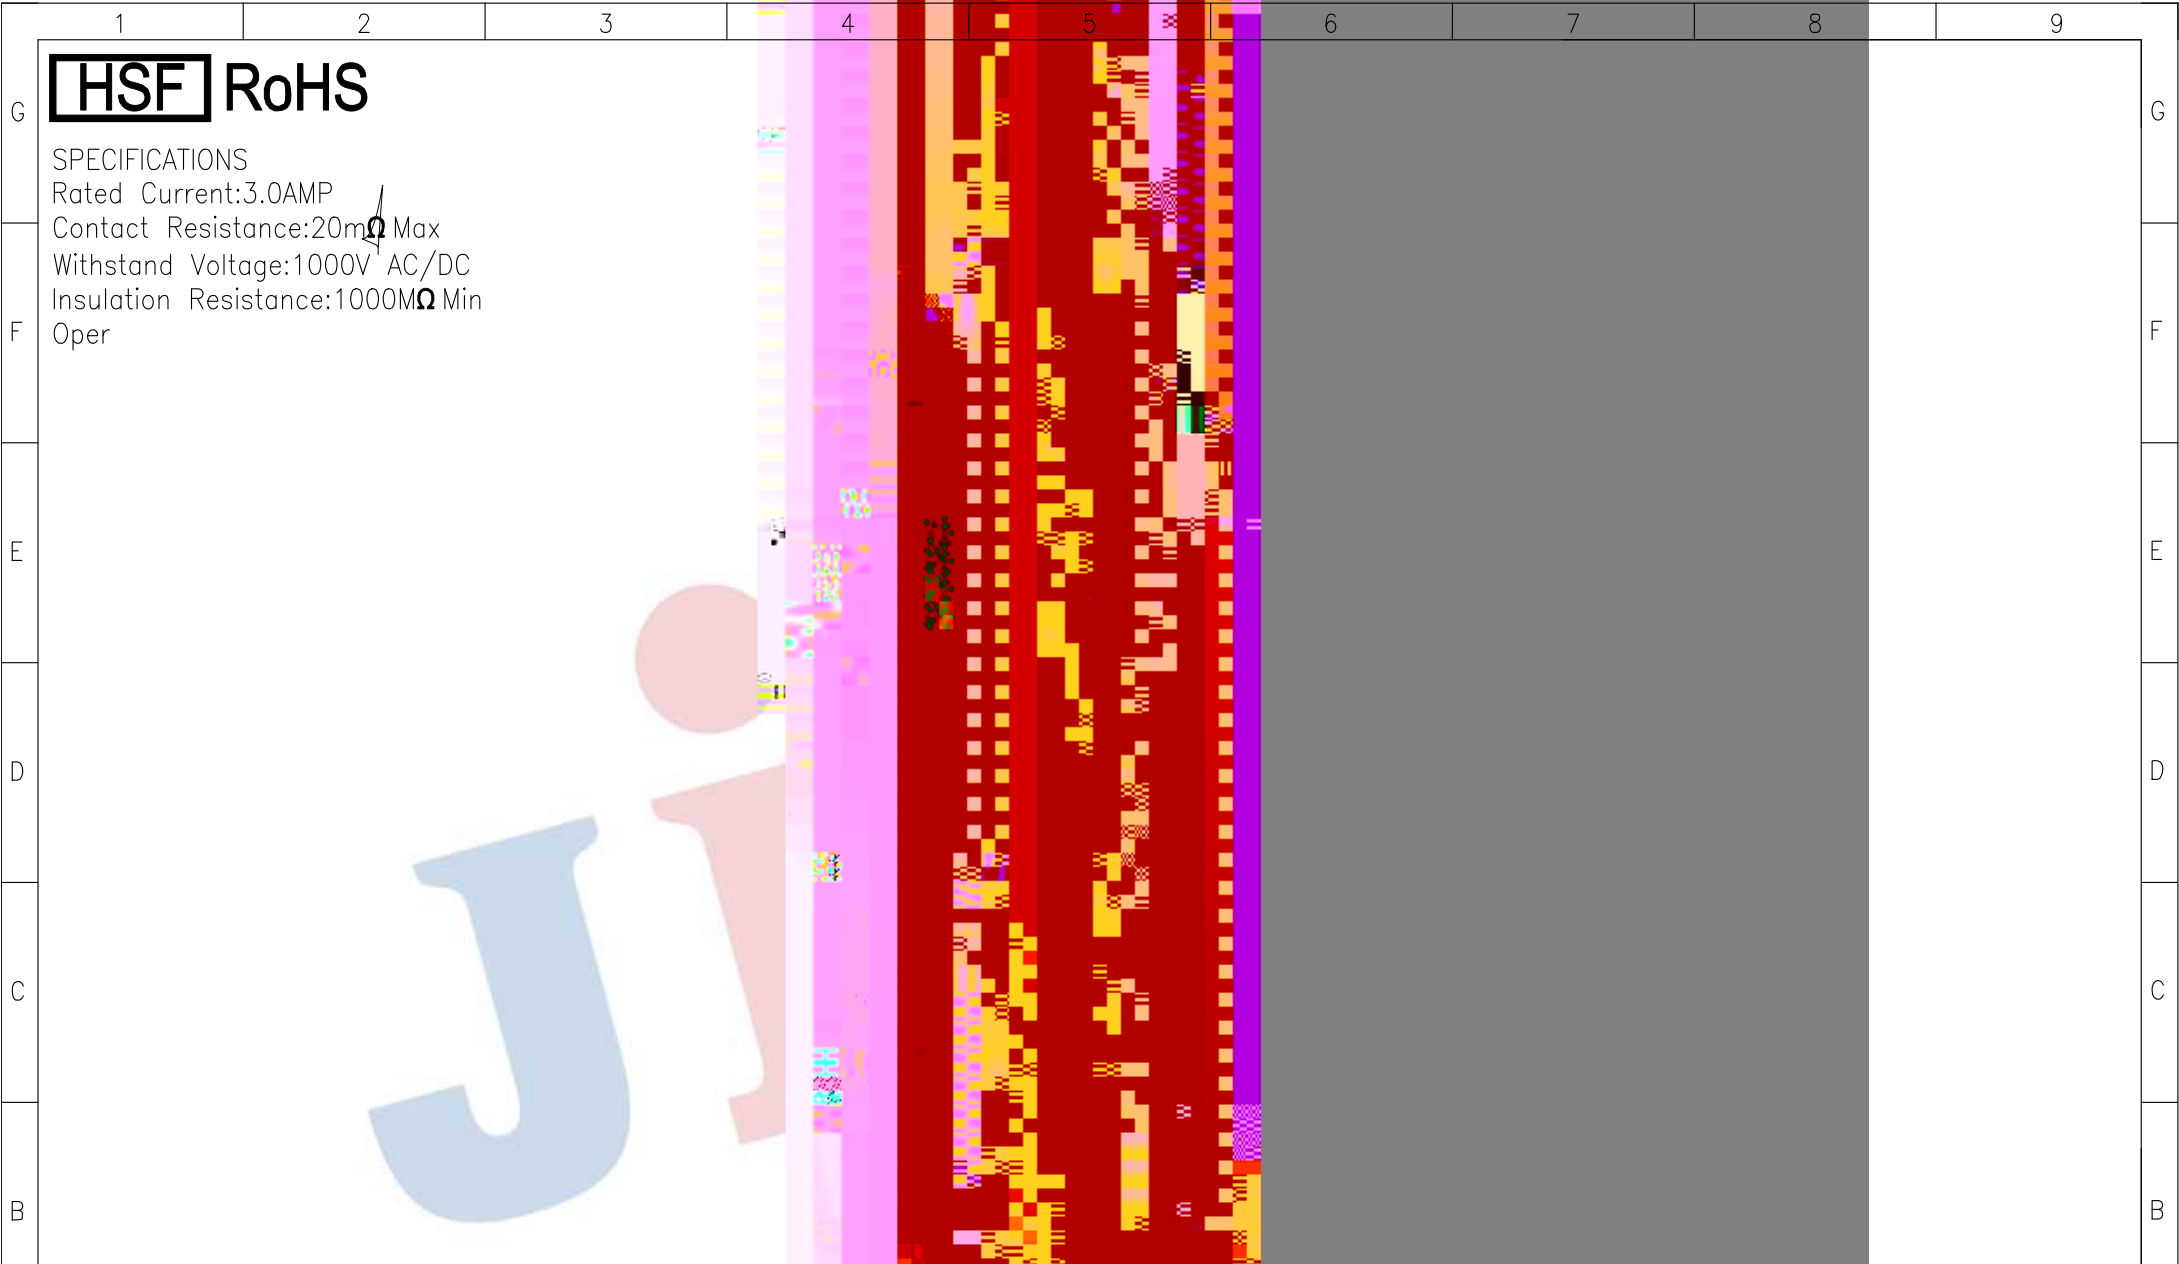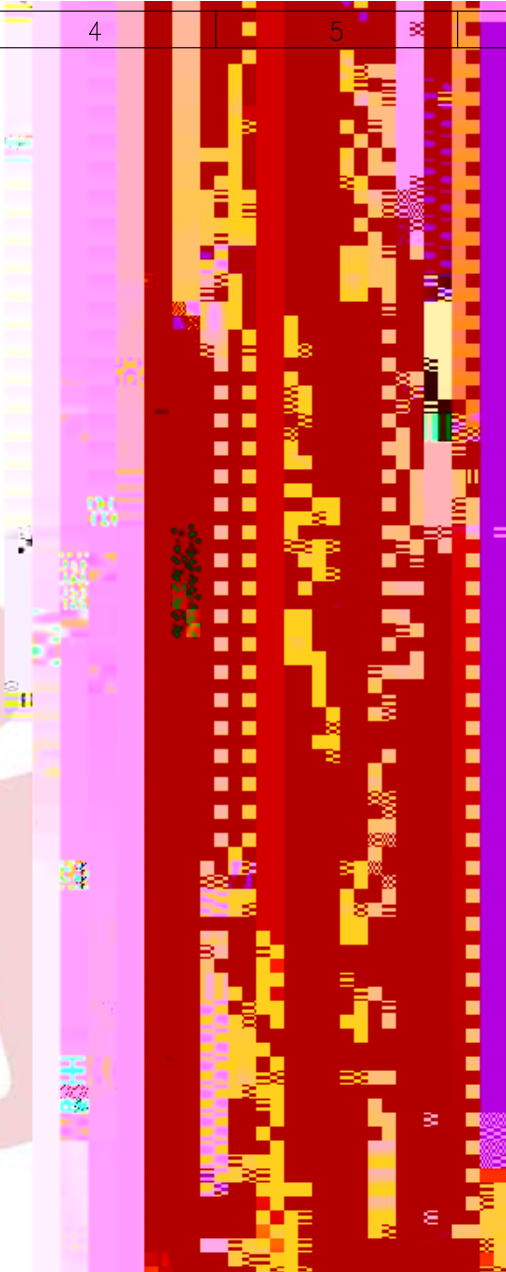

				OPERATION	DRAW	iyusheng	19.07.09	SCALE	FIT				
				X.X ±0.30	CHECK			UNIT	mm				
				X.XX ±0.20				SIZE	A4	PART NO.		4410-2XXMXXMEBWOX	
				X.XXX ±0.10				SHEET	1/1	TITLE:		2.0加强型金手指连接器 公座 2xNpin H20.2 SMT 带柱	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ±3'	APPROVE			PROJ.	⌀ ↺				
1	2	3	4	DIM	TOL					6	7	8	9