




**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C, 10s(PBT insulator)  
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

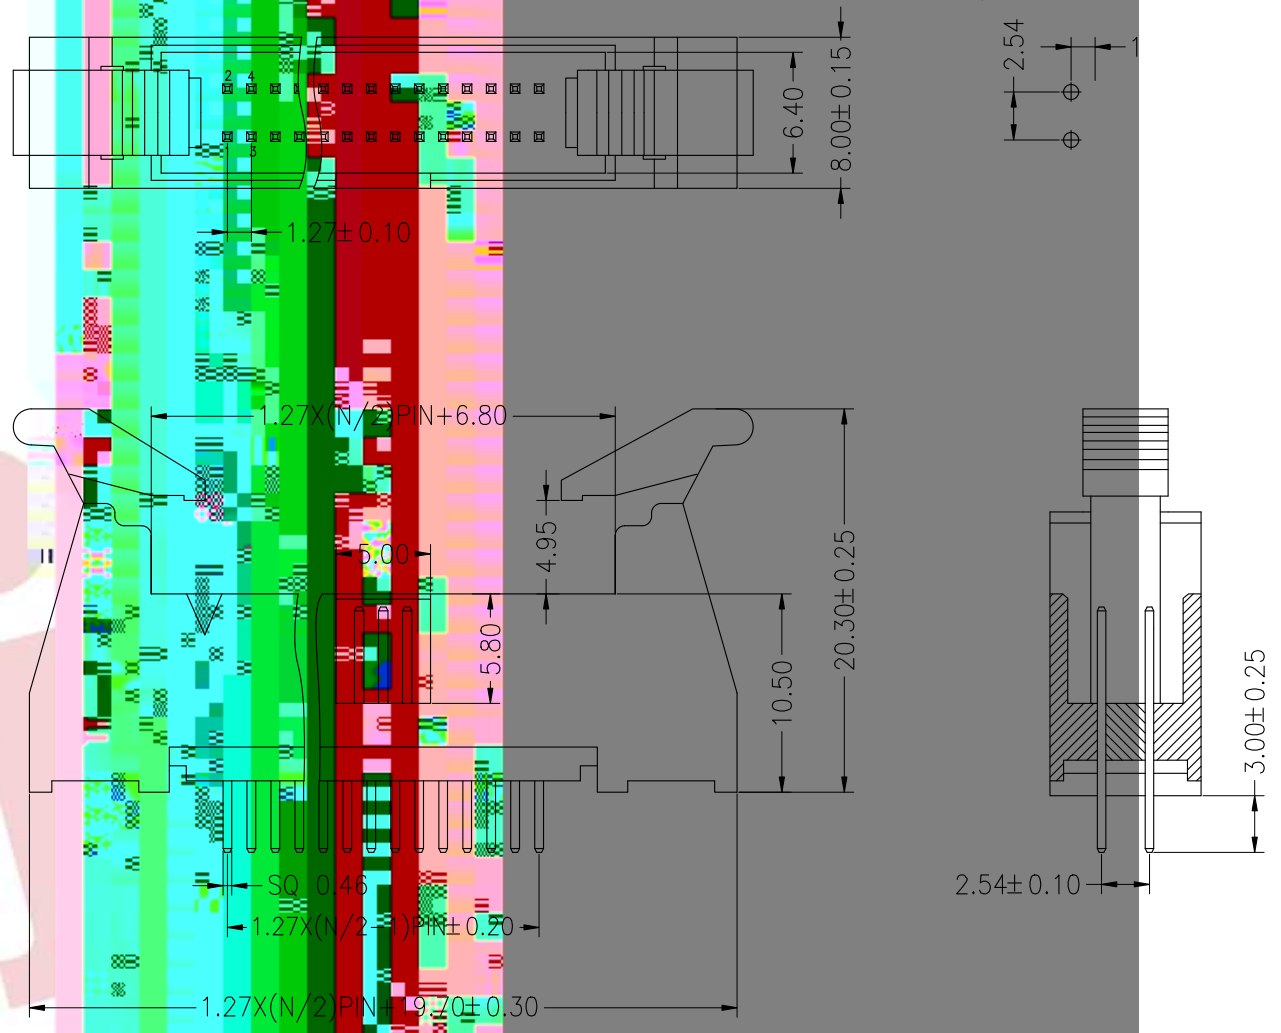

**Ordering Information**

**3340 XX S XX X B L X 0X**

- No. of Pins: 10--100
- Contact Plating:
  - G0:Gold Flash
  - G1:1u" Gold
  - G2:1.5u" Gold
  - G3:2u" Gold
  - G4:3u" Gold
  - G5:5u" Gold
  - G6:10u" Gold
  - G7:15u" Gold
  - G8:30u" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- Insulator Material Option:
  - A=BK-PBT
  - C=BK-PA6T
  - E=BK-PA9T
- Color Type:
  - B=Black
- Packing:
  - A=Tray
  - T=Tube
  - R=Reel

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAWN Wei Chen

CHECK

APPROVE

21.04.14

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

⌀

PART NO.

3340XXSXXBLX0X

TITLE:

1.27\*2.54mm ejector header Npin 180°

A0 2021.04.14 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION CHANGE