



**SPECIFICATIONS**

Current Rating:3.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V AC RMS  
 Operation Temperature:-40°C to +105°C


Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Soldering Temperature:260°C±5°C For 5~10 Second

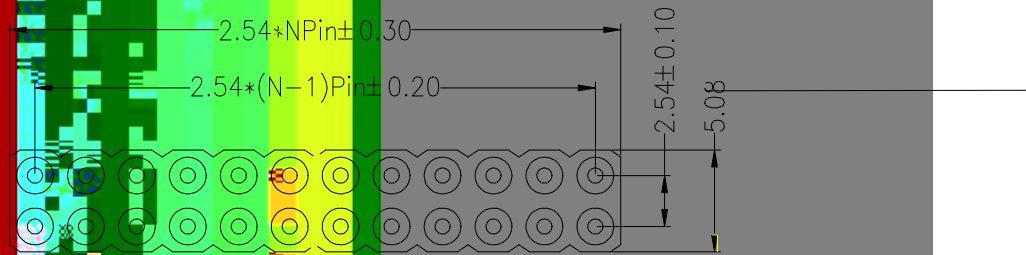

**Ordering Information**

**3610 30 2 XX S XX 120 XX**

No. of Pins Per Row NPin N=02~40	Contact Plating G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin	Pin Length 120=12.01mm
----------------------------------------	-----------------------------------------------------------------------------------------------------------------------------	---------------------------

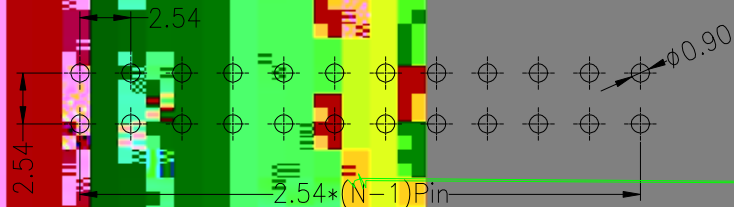

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)